

Picnik

© design by Dirk Wynants & Xavier Lust

- With standard feet
- With floor fastening
- With protective feet



Picnik with standard feet

700

355

1470

630

750

461

751


950

BOX 1: PICNIK


Box dimensions (mm)		L	W	H	Qty (#)	Volume (m³)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Picnik with standard feet	Box 1	1500	1000	800	1	1,20	73,70	60,00	13,70

extremis®

Picnik with floor fastening feet

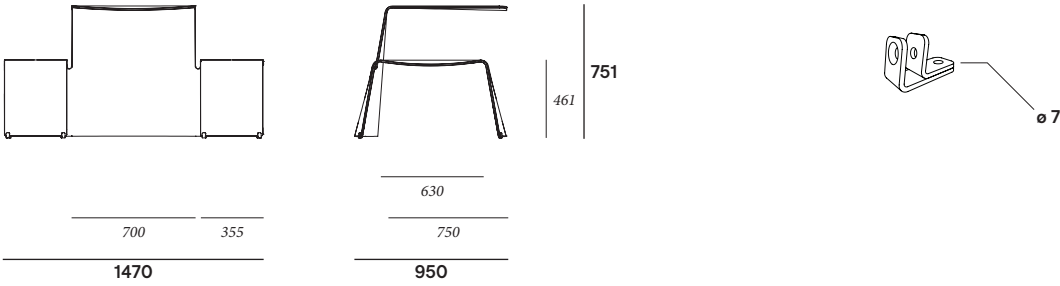


BOX 1: PICNIK




Box dimensions (mm)		L	W	H	Qty (#)	Volume (m³)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Picnik with floor fastening feet	Box 1	1500	1000	800	1	1,20	73,70	60,20	13,50

Picnik with protective feet

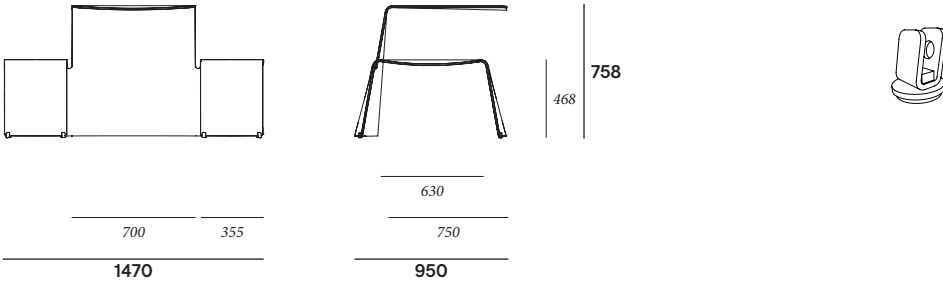

BOX 1: PICNIK



Box dimensions (mm)		L	W	H	Qty (#)	Volume (m³)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Picnik with protective feet	Box 1	1500	1000	800	1	1,20	73,70	60,20	13,50



Structured powder-coated



Structured powder-coating*

Glossy powder-coated



Colour on request

Anodised



Natural*

*Subject to change, check price list or www.extremis.com

Materials	Key facts	Thickness	Layer thickness	Density	In/outdoor	Water	UV colour fastness	Flame retarding
		mm	micron					
Structured powder-coated aluminium	<ul style="list-style-type: none">• A technique of applying dry paint to a part• Electrostatically charged and sprayed onto the object• Placed in an oven and powder particles melt and coalesce to form a continuous film• More scratch-resistant than non structured powder-coating	10	50 - 100	2,70 10 ³ kg/m ³	Outdoor & indoor	n.a.	Very good: colour can fade to some extent when exposed to UV	NEN-EN 13501-1 A2-s1*
Glossy powder-coated aluminium	<ul style="list-style-type: none">• A technique of applying dry paint to a part• Eelectrostatically charged and sprayed onto the object• Placed in an oven and powder particles melt and coalesce to form a continuous film	10	50 - 100	2,70 10 ³ kg/m ³	Outdoor & indoor	n.a.	Very good: colour can fade to some extent when exposed to UV	NEN-EN 13501-1 A2-s1*
Anodised aluminium	<ul style="list-style-type: none">• A process aimed at thickening the existing aluminium oxide layer• Thickest layer of protection	10	50 - 100	2,70 10 ³ kg/m ³	Outdoor & indoor	n.a.	Very good	NEN-EN 13501-1 A1*

* NEN-EN13501-1 A2-s1

Satisfying the same criteria as class B for the SBI-test according to EN 13823. In addition, under conditions of a fully developed fire these products will not significantly contribute to the fire load and fire growth.

Warnings

General

- Do not use any sharp tools to open the packaging.
- We strongly advise against using power tools.
- Tripping hazard, mind your step.
- Do not put out cigarettes on the table.
- Not graffiti proof.
- Do not leave children unattended whilst playing on the table.
- To avoid danger of suffocation, keep plastic bags away from babies and children.
- Colours can differ over years and from batch to batch.

Product

- Do not drag the table, but carry it with minimum 2 people.
- Anchoring the product has to be done by qualified

people.

- For anchoring: use suitable bolts or screws from a specialized store depending on the material your terrace is made of.
- There are protective feet for indoor use.
- Stackable up to 5 pieces and protect with blankets.
- Always stack the table with 2 people.
- The Picnik tabletop can bear a maximum load of 120 kg.
- Max. 2 people or 160 kg per bench.

Powder-coating

- White powder-coating requires more maintenance.
- Do not use abrasive scouring powders or scourers as they will scratch the surface.
- Colour can fade to some extent when exposed to UV.
- Flame retarding - NEN-EN13501-1 A2-sl - Satisfying

the same criteria as Class B for the SBI-test according to EN13823. In addition, under conditions of a fully developed fire these products will not significantly contribute to the fire load and fire growth.

- Dark colors can get very hot in sunny weather.

Anodised aluminium

- Do not use abrasive scouring powders or scourers as they will scratch the surface.
- Colour can fade to some extent when exposed to UV.
- Flame retarding - NEN-EN13501-1 A2-sl - Satisfying the same criteria as Class B for the SBI-test according to EN13823. In addition, under conditions of a fully developed fire these products will not significantly contribute to the fire load and fire growth.
- Dark colors can get very hot in sunny weather.

Applications

Residential: living room, kitchen, on terraces, patios or courtyard. Indoor as well as outdoor.

Project: hotel and catering industry, company terraces, public spaces, squares, event venues, schools, ...

F.a.q.

Q: Is it possible to stack the table?

A: It is possible, but as it is quite heavy, it is not so often done. To avoid damage, use blankets.

Q: Is it easy to move the table?

A: With two people this is very doable.

Maintenance

Find maintenance instructions at the downloads section of extremis.com for:

POWDER-COATED PARTS

- White powder-coating obviously requires more maintenance.
- Clean stains with a magic eraser.

ANODISED PARTS

- Clean with lukewarm water and a mild detergent or with Extremis Multi Cleaner.

Floor fastening

Picnik comes with an optional floor fastening set: four stainless steel feet to be fixed with bolts.




Protective feet

Picnik comes with optional protective feet for delicate floors: four stainless steel feet with felt to be fixed with bolts.



Good to know

- Also a miniature version of this iconic piece is available in shops.
- Picnik is cut out of one aluminium sheet without any loss of material.

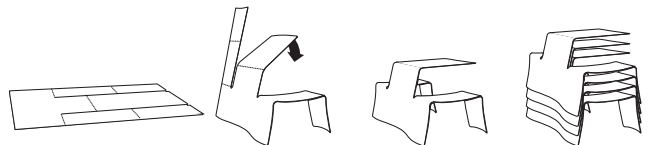

Awards



Website

www.extremis.com/picnik