




### KTribe Floor 3

by Philippe Starck , 2007





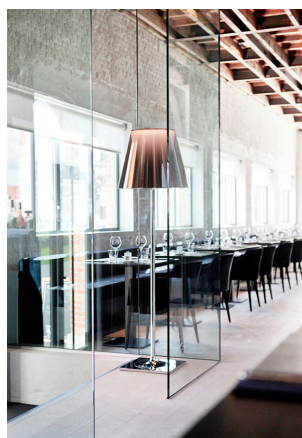


Floor lamp providing diffused lighting. Base, rod support and diffuser support in die-cast, polished and chrome-plated Zamak alloy. Galvanized P04 steel base cover. Injectionmolded PC (polycarbonate) opal inner diffuser and support for the lamp-holder. Outer diffusers in transparent or fumée PMMA (polymethylmethacrylate), and silver or bronze on the inner surface, by vacuum aluminum coating. Injection-molded PC (polycarbonate) upper ring, completely transparent or transparent diffuser and silver diffuser) or transparent brown for the outer bronze diffuser. On the cable there is the electronic dimmer which allows the regulation of light brightness.



Mounting	Floor
Environment	Indoor
Weight	14 Kg
Light sources available	1 x LED 21W E27 2452lm 3000K [e] cod. RF26998 Dimmable
Emergency	Without
Switching	On the cable there is the electronic dimmer which allows the regulation of light brightness with a dial.
Voltage	220-240V
Power	MAX 250W
Battery	No
Supply included	Yes

**Materials** Aluminum, Fabric, Polycarbonate, Polymethylmethacrylate

**Colors**

-  F63010 - Fabric
-  F6301000 - Transparent
-  F6301004 - Aluminized Silver
-  F6301046 - Aluminized Bronze
-  F6301030 - Fumée


**Certificate**     

## KTribe Floor 2

by Philippe Starck , 2006




Floor lamp providing diffused lighting. Base, rod support and diffuser support in die-cast, polished and chrome-plated Zamak alloy. Galvanized P04 steel base cover. Injectionmolded PC (polycarbonate) opal inner diffuser and support for the lamp-holder. Outer diffusers in transparent or fumée PMMA (polymethylmethacrylate), and silver or bronze on the inner surface, by vacuum aluminum coating. Injection-molded PC (polycarbonate) upper ring, completely transparent or transparent diffuser and silver diffuser) or transparent brown for the outer bronze diffuser. On the cable there is the electronic dimmer which allows the regulation of light brightness.




Mounting	Floor
Environment	Indoor
Weight	6.7 Kg
Light sources available	1 x LED 21W E27 2452lm 3000K [e] cod. RF26998 Dimmable
Emergency	Without
Switching	On the cable there is the electronic dimmer which allows the regulation of light brightness with a dial.
Voltage	220-240V
Power	MAX 150W
Battery	No
Supply included	Yes
Cord Length	2010 mm
Materials	Aluminum, Fabric, Polycarbonate, Polymethylmethacrylate
Colors	<ul style="list-style-type: none"> <li>F63050 - Fabric</li> <li>F6305000 - Transparent</li> <li>F6305004 - Aluminized Silver</li> <li>F6305046 - Aluminized Bronze</li> <li>F6305030 - Fumée</li> </ul>
Certificate	

## KTribe Floor 1

by Philippe Starck , 2007

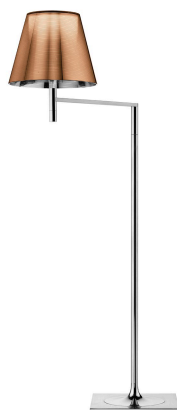

Floor lamp providing diffused lighting; a switch located near the diffuser allows for 4-level light adjustment via a "remote" dimmer positioned on the power cord near the plug. Base and rod support in die-cast, polished and chrome-plated Zamak alloy. Rod, arm support, arm and diffuser support in polished aluminum tube. Molded steel counterweight with galvanized finish. Injection-molded PC (polycarbonate) inner diffuser opal color. Outer diffusers in transparent or fumée PMMA (polymethylmethacrylate) and silver or bronze on the inner surface, by vacuum aluminum coating. Injection-molded PC (polycarbonate) upper ring, completely transparent, or transparent brown for the outer bronze diffuser.



Mounting	Floor
Environment	Indoor
Weight	4.3 Kg
Light sources available	1 x LED 8W E27 740lm 2700K [e] cod. RF25323 Dimmable 1 x LED 8W E27 740lm 3000K [e] cod. RF25317 Dimmable 1 x LED 8,5W E27 806lm 2200-2700K [e] cod. RF26360 Dimmable
Emergency	Without
Switching	On the cable there is the electronic dimmer which allows the step regulation of light brightness with a push button hidden under the diffuser stem.
Voltage	220-240V
Power	MAX 100W
Battery	No
Supply included	Yes
Cord Length	1500 mm
Materials	Aluminum, Fabric, Polycarbonate, Polymethylmethacrylate
Colors	<ul style="list-style-type: none"> <li>F62650 - Fabric</li> <li>F6265004 - Aluminized Silver</li> <li>F6265046 - Aluminized Bronze</li> <li>F6265000 - Transparent</li> <li>F6265030 - Fumée</li> </ul>



## KTribe Suspension 3

by Philippe Starck , 2005

Suspension lamp providing diffused light. PC (polycarbonate) inner diffuser, with opal white finish. Outer diffusers in transparent or fumée PMMA (polymethylmethacrylate), and silver or bronze on the inner surface, by vacuum aluminum coating.

Three stainless steel cables, length 4000 mm for suspension of the diffuser assembly.

White ceiling rose.






Mounting	Pendant
Environment	Indoor
Weight	4.5 Kg
Light sources available	1 x LED 21W E27 2452lm 3000K [e] cod. RF26998 Dimmable
Emergency	Without
Voltage	220-250V
Power	MAX 250W
Battery	No
Supply included	Yes

Cord Length	4000 mm
Materials	PMMA, Polycarbonate

Colors	<ul style="list-style-type: none"> <li>F6258000 - Aluminized Silver</li> <li>F6258000A - Transparent</li> <li>F6258046 - Aluminized Bronze</li> <li>F6258030 - Fumée</li> </ul>
--------	---

### Certificate



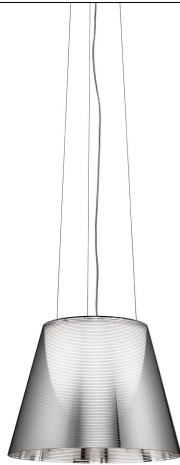


## KTribe Suspension 2

by Philippe Starck , 2005

Suspension lamp providing diffused light. PC (polycarbonate) inner diffuser, with opal white finish. Outer diffusers in transparent or fumée PMMA (polymethylmethacrylate), and silver or bronze on the inner surface, by vacuum aluminum coating.

Three stainless steel cables, length 4000 mm for suspension of the diffuser assembly.

White ceiling rose.


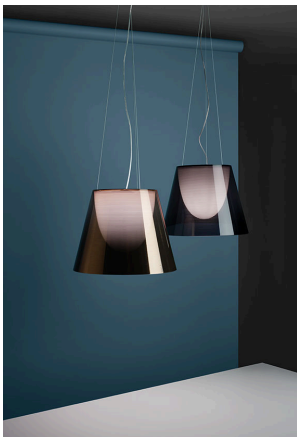



Mounting	Pendant
Environment	Indoor
Weight	2.5 Kg
Light sources available	1 x LED 21W E27 2452lm 3000K [e] cod. RF26998 Dimmable
Emergency	Without
Voltage	220-250V
Power	MAX 150W
Battery	No
Supply included	Yes

Cord Length	4000 mm
Materials	PMMA, Polycarbonate

Colors	<ul style="list-style-type: none"> <li>F6257046 - Aluminized Bronze</li> <li>F6257000 - Aluminized Silver</li> <li>F6257000A - Transparent</li> <li>F6257030 - Fumée</li> </ul>
--------	---

Certificate





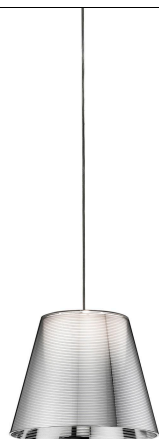

## KTribe Suspension 1

by Philippe Starck , 2005

Suspension lamp providing diffused light. PC (polycarbonate) inner diffuser, with opal white finish. Outer diffuser available in finishes: fumée, made in PMMA (polymethylmethacrylate) or silver, made by vacuum aluminum coating on the inner surface. Single support cable. White ceiling rose.



Mounting	Pendant
Environment	Indoor
Weight	1 Kg
Light sources available	1 x LED 2W G9 240lm 2700K cod. RF26520 [e] No Dimmable 1 x LED 3W G9 290lm 2700K [e] cod. 28425 Non dimmable

Emergency	Without
Voltage	220-250V
Power	MAX 75W
Battery	No
Supply included	Yes

Cord Length	4000 mm
Materials	PMMA, Polycarbonate

Colors	<div style="display: flex; align-items: center;"> <div style="width: 10px; height: 10px; background-color: #ccc; border-radius: 50%; margin-right: 5px;"></div> F6256000 - Aluminized Silver </div> <div style="display: flex; align-items: center;"> <div style="width: 10px; height: 10px; background-color: #333; border-radius: 50%; margin-right: 5px;"></div> F6256030 - Fumée </div>
--------	---

### Certificate





## KTribe Table 2

by Philippe Starck , 2007



Table luminaire providing diffused lighting. Base, rod support and diffuser support in diecast, polished and chrome-plated Zamak alloy. Base cover in black injection-molded PA (Nylon). Injection-molded PC (polycarbonate) opal inner diffuser. Outer diffusers in transparent or fumée PMMA (polymethylmethacrylate), and silver or bronze on the inner surface, by vacuum aluminum coating. Injection-molded PC (polycarbonate) upper ring, completely transparent or transparent diffuser and silver diffuser) or transparent brown for the outer bronze diffuser.



Mounting	Table
Environment	Indoor
Weight	5.9 Kg
Light sources available	1 x LED 13W E27 1400lm 2700K [e] cod. RF26065 Dimmable 1 x LED 13W E27 1400lm 3000K [e] cod. RF25535 Dimmable

Emergency	Without
Voltage	220-240V
Power	150W
Battery	No
Supply included	Yes

Cord Length	1640 mm
Materials	Aluminum, Polycarbonate, Polymethylmethacrylate

Colors	<ul style="list-style-type: none"> <li>F63030 - Fabric</li> <li>F6303000 - Transparent</li> <li>F6303004 - Aluminized Silver</li> <li>F6303046 - Aluminized Bronze</li> <li>F6303030 - Fumée</li> </ul>
--------	---

Certificate	
-------------	--

## KTribe Table 1



by Philippe Starck , 2007



Table luminaire providing diffused lighting. Base, rod support and diffuser support in die-cast, polished Zamak alloy. Polished aluminum tubular. Injection-molded, matte black PA (Nylon) base cover. Injection-molded PC (polycarbonate) opal inner diffuser. Outer diffuser in transparent or fumée PMMA (polymethylmethacrylate).



Mounting	Table
Environment	Indoor
Weight	3.1 Kg
Light sources available	1 x LED 8W E27 740lm 3000K [e] cod. RF25317 Dimmable 1 x LED 8W E27 740lm 2700K [e] cod. RF25323 Dimmable
Emergency	Without
Switching	On the cable there is a traditional dimmer which allows the regulation of light.
Voltage	220-240V
Power	100W
Battery	No
Supply included	Yes
Cord Length	1640 mm
Materials	Aluminum, Methacrylate, Polycarbonate
Colors	<div> <div></div> F6263000 - Transparent         </div> <div> <div></div> F6263030 - Fumée         </div>



Certificate








## KTribe Table 1 Glass

by Philippe Starck , 2007



Table luminaire providing diffused lighting. Base, rod support and diffuser support in die-cast, polished Zamak alloy. Polished aluminum tubular. Injection-molded, matte black PA (Nylon) base cover. Injection-molded PC (polycarbonate) opal inner diffuser. Outer diffuser in transparent glass



Mounting	Table
Environment	Indoor
Weight	4.6 Kg
Light sources available	1 x LED 8W E27 740lm 3000K [e] cod. RF25317 Dimmable 1 x LED 8W E27 740lm 2700K [e] cod. RF25323 Dimmable
Emergency	Without
Switching	On the cable there is a traditional dimmer which allows the regulation of light.
Voltage	220-240V
Power	100W
Battery	No
Supply included	Yes
Cord Length	1640 mm
Materials	Aluminum, Glass, Polycarbonate
Colors	 F6281000 - Transparent
Certificate	